

## Hose Kits



# Pre-Assembled Hose and Coupling Combinations for Immediate Use

**CEJN hose kits provide an easy, convenient means of obtaining just the right hose and coupling combinations for pneumatic applications.**


Each kit contains a CEJN polyurethane hose style, Stream-Line couplings, nipples, and swivels that provide reusable, leak-free hose connections.

Each kit is ready for immediate use without the need for tools, and customers are ensured of no missing parts. Kit contents are reusable and air tight and won't need follow-up tightening. The hose kit concept also simplifies ordering procedures, since only one part number is required to order multiple products.

Stream-Line Nipple

Polyurethane Hose

Stream-Line Coupling

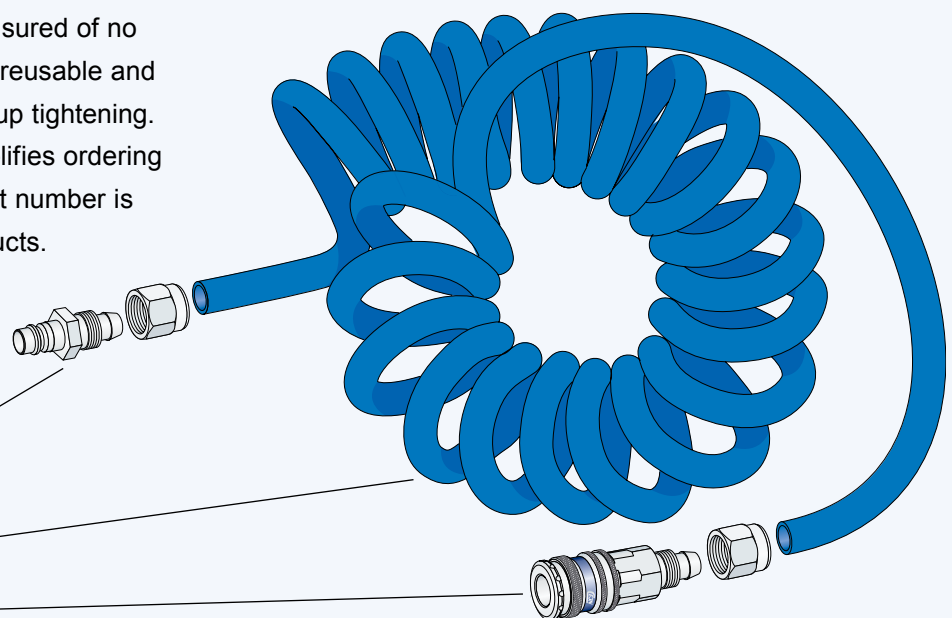




# PUR Hose Kits – with Series 300

## ARO 210 STANDARD

BENELUX, NORTH AMERICA, SWITZERLAND


### Technical Data






**Size (IDxOD mm)** ..... 5x8, 6.5x10, 8x12, 11x16  
**Length**..... From 2 to 20 m (from 6.5 to 65.5 ft)  
**Max. working pressure** ..... Spiral 10 bar (145 PSI), Straight 16 bar (232 PSI)  
**Hose**..... Straight Braided or Spiral



 **This series includes safety products.**  
 For other safety products, see Page 71-78.




### Air Flow

-  Hose 5x8 mm
-  Hose 6.5x10 mm
-  Hose 8x12 mm
-  Hose 11x16 mm

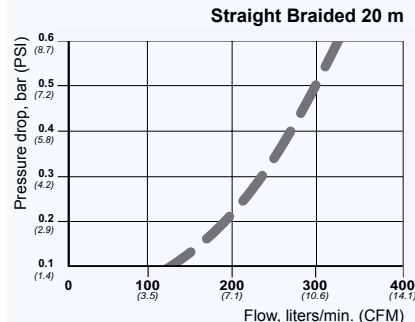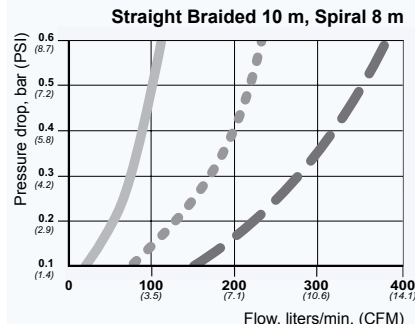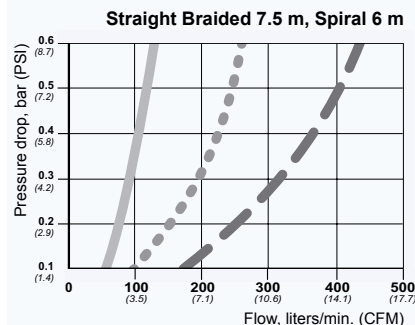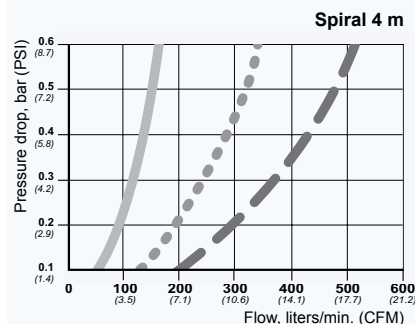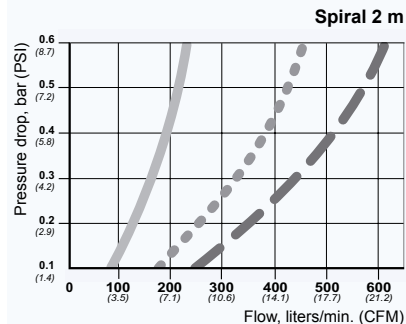

SERIES 300	Service Length	ID x OD (mm)	Standard	Vented Safety	
	2 m	5 x 8	19 958 9977	-	
		6.5 x 10	19 958 9946	19 958 9739	
		8 x 12	19 958 9996	-	
	4 m	5 x 8	19 958 9980	-	
		6.5 x 10	19 958 9948	19 958 9740	
		8 x 12	19 958 9975	19 958 9712	
	6 m	5 x 8	19 958 9982	-	
		6.5 x 10	19 958 9952	19 958 9741	
		8 x 12	19 958 9960	19 958 9713	
	8 m	5 x 8	19 958 9984	-	
			6.5 x 10	19 958 9956	19 958 9742
			8 x 12	19 958 9961	19 958 9714
11 x 16		19 958 9813	19 958 9782		
		Straight Braided			-
		7.5 m	6.5 x 10	19 958 9994	-
	10 m	6.5 x 10	19 958 9959	19 958 9793	
		8 x 12	19 958 9802	19 958 9704	
	15 m	6.5 x 10	19 958 9995	19 958 9794	
		8 x 12	19 958 9842	19 958 9705	
	20 m	8 x 12	19 958 9790	19 958 9796	

Flow capacity is measured at 6 bar (87 PSI) inlet pressure, and pressure drop at 0.5 bar (7 PSI). Check with an authorized CEJN distributor for availability and prices.




# PUR Hose Kits – with Series 310

A-A 59439 (former U.S. Standard MIL C 4109 1/4"), ISO 6150 B



BENELUX, FRANCE, NORTH AMERICA, NORWAY, SWITZERLAND

## Technical Data

**Size (IDxOD mm)** ..... 5x8, 6.5x10, 8x12, 11x16  
**Length**..... From 2 to 20 m (from 6.5 to 65.5 ft)  
**Max. working pressure** ..... Spiral 10 bar (145 PSI), Straight 16 bar (232 PSI)  
**Hose**..... Straight Braided or Spiral






 **This series includes safety products.**  
 For other safety products, see Page 71-78.




SERIES 310	Service Length	ID x OD (mm)	Standard	Vented Safety
	2 m	5 x 8	19 958 9923	-
		6.5 x 10	19 958 9927	-
		8 x 12	19 958 9931	-
		11 x 16	19 958 9935	-
	4 m	5 x 8	19 958 9924	-
		6.5 x 10	19 958 9928	-
		8 x 12	19 958 9932	19 958 9709
		11 x 16	19 958 9936	-
	6 m	5 x 8	19 958 9925	-
		6.5 x 10	19 958 9929	-
		8 x 12	19 958 9933	19 958 9710
		11 x 16	19 958 9937	-
8 m	5 x 8	19 958 9926	-	
	6.5 x 10	19 958 9930	-	
	8 x 12	19 958 9934	19 958 9711	
	11 x 16	19 958 9938	-	
	5 m	8 x 12	-	19 958 9700
	10 m	6.5 x 10	19 958 9600	-
		8 x 12	19 958 9832	19 958 9701
	15 m	8 x 12	19 958 9833	19 958 9702
20 m	8 x 12	19 958 9822	-	

## Air Flow

— Hose 5x8 mm  
 - - - - - Hose 6.5x10 mm  
 - - - - - Hose 8x12 mm  
 - - - - - Hose 11x16 mm

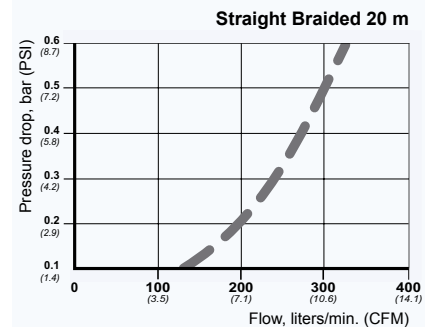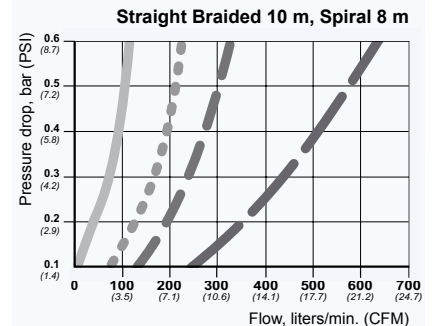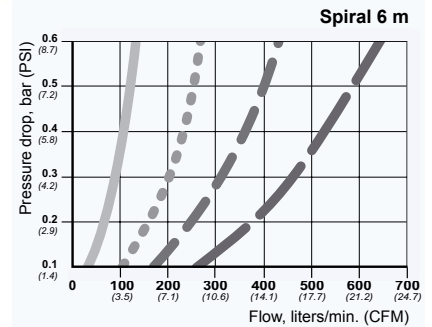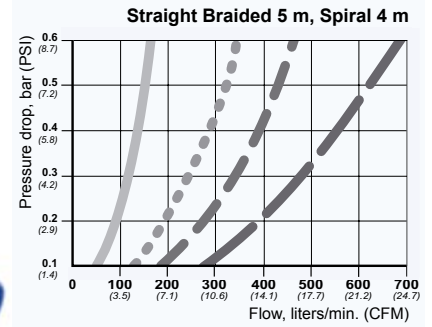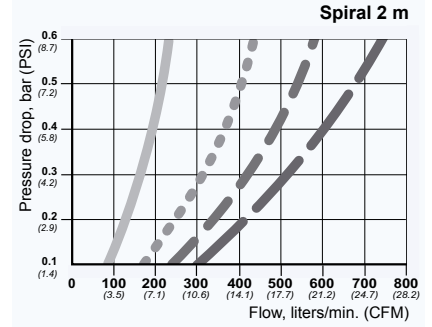

Flow capacity is measured at 6 bar (87 PSI) inlet pressure, and pressure drop at 0.5 bar (7 PSI). Check with an authorized CEJN distributor for availability and prices.




# PUR Hose Kits – with Series 320

CEJN, EUROSTANDARD 7.6 (7.4)

GLOBAL

## Technical Data






**Size (IDxOD mm)** ..... 5x8, 6.5x10, 8x12, 11x16  
**Length**..... From 2 to 20 m (from 6.5 to 65.5 ft)  
**Max. working pressure** ..... Spiral 10 bar (145 PSI), Straight up to 16 bar (232 PSI)  
**Hose**..... Straight Braided or Spiral



 **This series includes safety products.**  
 For other safety products, see Page 71-78.




## Air Flow

— Hose 5x8 mm  
 - - - - - Hose 6.5x10 mm  
 — — — — — Hose 8x12 mm  
 — — — — — Hose 11x16 mm

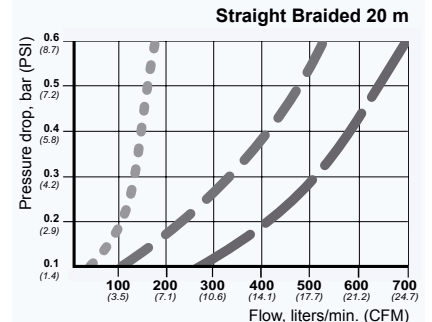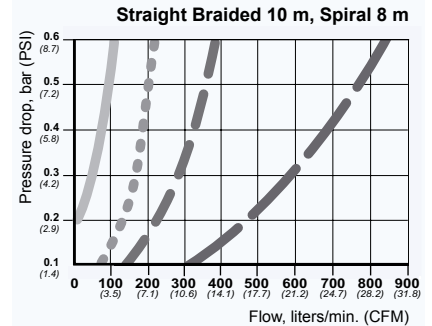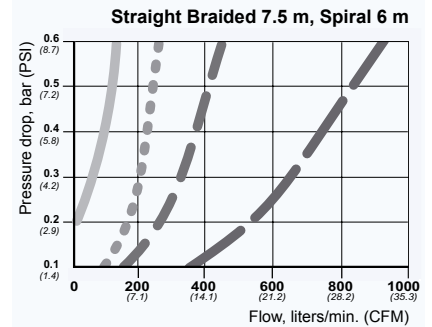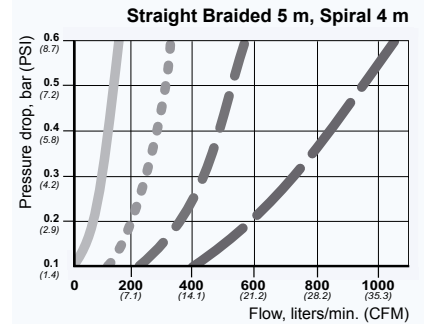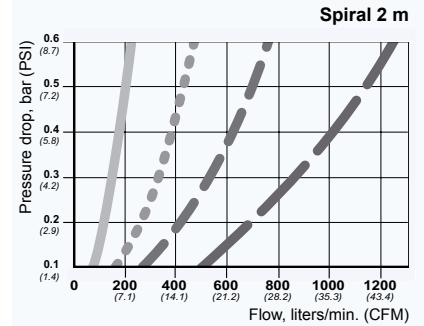

SERIES 320	Service Length	ID x OD (mm)	Standard	Vented Safety	
	2 m	5 x 8	19 958 9907	-	
		6.5 x 10	19 958 9910	19 958 9763	
		8 x 12	19 958 9914	19 958 9762	
		11 x 16	19 958 9917	19 958 9767	
	4 m	5 x 8	19 958 9903	-	
		6.5 x 10	19 958 9904	19 958 9764	
		8 x 12	19 958 9905	19 958 9706	
		11 x 16	19 958 9906	19 958 9768	
	6 m	5 x 8	19 958 9908	-	
		6.5 x 10	19 958 9912	19 958 9765	
		8 x 12	19 958 9915	19 958 9707	
		11 x 16	19 958 9918	19 958 9769	
8 m	5 x 8	19 958 9909	-		
	6.5 x 10	19 958 9913	19 958 9766		
	8 x 12	19 958 9916	19 958 9708		
	11 x 16	19 958 9919	19 958 9770		
	5 m	8 x 12	-	19 958 9897	
	7.5 m	8 x 12	19 958 9884	-	
		10 m	6.5 x 10	19 958 9882	19 958 9771
			8 x 12	19 958 9829	19 958 9898
	15 m	11 x 16	19 958 9737	19 958 9738	
		20 m	6.5 x 10	-	19 958 9772
	8 x 12		19 958 9830	19 958 9899	
	11 x 16		19 958 9748	19 958 9775	
20 m	6.5 x 10	-	19 958 9773		
	8 x 12	19 958 9831	19 958 9774		
	11 x 16	19 958 9894	19 958 9776		

Flow capacity is measured at 6 bar (87 PSI) inlet pressure, and pressure drop at 0.5 bar (7 PSI). Check with an authorized CEJN distributor for availability and prices.




# PUR Hose Kits – with Series 410

CEJN ORIGINAL STANDARD, EUROSTANDARD 10.4  
GLOBAL







## Technical Data



**Size (IDxOD mm)** ..... 11x16  
**Length**..... From 2 m up to 15 m (from 6.5 to 49.3 ft)  
**Max. working pressure** ..... Spiral 10 bar (145 PSI), Straight up to 16 bar (232 PSI)  
**Hose**..... Straight braided or Spiral



 **This series includes safety products.**  
 For other safety products, see Page 71-78.



### Air Flow

-  Hose 2 m 11x16 mm
-  Hose 4 m 11x16 mm
-  Hose 6 m 11x16 mm
-  Hose 8 m 11x16 mm
-  Hose 10 m 11x16 mm
-  Hose 15 m 11x16 mm

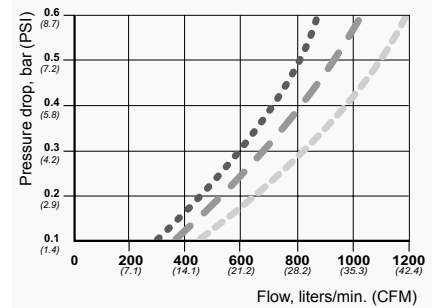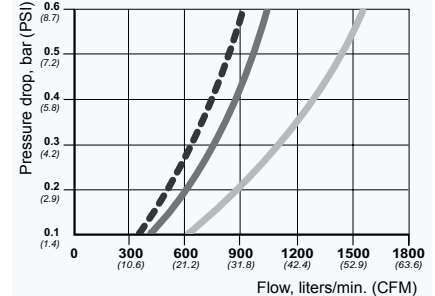

SERIES 410	Service Length	ID x OD (mm)	Standard	Vented Safety
 Spiral	2 m	11x16	-	19 958 9485
	4 m	11x16	-	19 958 9486
	6 m	11x16	-	19 958 9487
	8 m	11x16	-	19 958 9488
 Straight Braided	10 m	11x16	-	19 958 9489
	15 m	11x16	-	19 958 9490

Flow capacity is measured at 6 bar (87 PSI) inlet pressure, and pressure drop at 0.5 bar (7 PSI). Check with an authorized CEJN distributor for availability and prices.



# Complete Spiral Hose Kits


## COUPLINGS, NIPPLES, AND ACCESSORIES


Connection 1: Short End


Connection 2: Long End


*This series includes safety products.*  
For other safety products, see Page 71-78.



SWIVEL & THREADED		Size ID x OD	Connection 1	Connection 2	Part No.
	2 m	5 x 8 mm	R 1/4" swiveling	R 1/4" swiveling	19 958 9978
		6.5 x 10 mm	R 1/4" swiveling	R 1/4" swiveling	19 958 9947
		8 x 12 mm	R 3/8" swiveling	R 3/8" swiveling	19 958 9997
		11 x 16 mm	R 1/2" swiveling	R 1/2" swiveling	19 958 9807
	4 m	5 x 8 mm	R 1/4" swiveling	R 1/4" swiveling	19 958 9965
		6.5 x 10 mm	R 1/4" swiveling	R 1/4" swiveling	19 958 9949
		8 x 12 mm	R 3/8" swiveling	R 3/8" swiveling	19 958 9967
		11 x 16 mm	R 1/2" swiveling	R 1/2" swiveling	19 958 9810
	6 m	5 x 8 mm	R 1/4" swiveling	R 1/4" swiveling	19 958 9983
		6.5 x 10 mm	R 1/4" swiveling	R 1/4" swiveling	19 958 9954
		8 x 12 mm	R 3/8" swiveling	R 3/8" swiveling	19 958 9998
		11 x 16 mm	R 1/2" swiveling	R 1/2" swiveling	19 958 9812
8 m	5 x 8 mm	R 1/4" swiveling	R 1/4" swiveling	19 958 9985	
	6.5 x 10 mm	R 1/4" swiveling	R 1/4" swiveling	19 958 9957	
	8 x 12 mm	R 3/8" swiveling	R 3/8" swiveling	19 958 9809	

FIXED & THREADED		Size ID x OD	Connection 1	Connection 2	Part No.
	2 m	6.5 x 10 mm	R 1/4"	R 1/4"	19 958 9987
	4 m	6.5 x 10 mm	R 1/4"	R 1/4"	19 958 9988
		8 x 12 mm	R 3/8"	R 3/8"	19 958 9805
		11 x 16 mm	R 1/2"	R 1/2"	19 958 9885
	6 m	5 x 8 mm	R 1/4"	R 1/4"	19 958 9857
		6.5 x 10 mm	R 1/4"	R 1/4"	19 958 9955
		8 x 12 mm	R 3/8"	R 3/8"	19 958 9804
		11 x 16 mm	R 1/2"	R 1/2"	19 958 9860
	8 m	5 x 8 mm	R 1/4"	R 1/4"	19 958 9866
		8 x 12 mm	R 3/8"	R 3/8"	19 958 9801
		11 x 16 mm	R 1/2"	R 1/2"	19 958 9862

HOSE KITS WITH BLOWGUN		Size ID x OD	Connection 1	Connection 2	Blowgun	Description	Part No.
	2 m	6.5 x 10 mm	320 nipple	R 1/4"	208 Star-Tip	Blowgun with removable tube	19 958 9654
	4 m	5 x 8 mm	320 nipple	R 1/4"	208 standard	-	19 958 9871
		5 x 8 mm	320 nipple	R 1/4"	208 Star-Tip	-	19 958 9872
		6.5 x 10 mm	R 1/4"	320 nipple	208 standard	Nipple on long hose end	19 958 9639
		6.5 x 10 mm	320 nipple	320 coupling	208 standard	Nipple assembled on blowgun	19 958 9901
		6.5 x 10 mm	310 nipple	310 coupling	208 standard	Nipple assembled on blowgun	19 958 9911
		6.5 x 10 mm	320 nipple	320 coupling	208 Star-Tip	10 320 1152 + Nipple assembled on blowgun	19 958 9746
	6 m	5 x 8 mm	320 nipple	R 1/4"	208 standard	Air curtain nozzle	19 958 9645
		5 x 8 mm	R 1/4"	310 nipple	208 standard	Nipple on long hose end	19 958 9652
		5 x 8 mm	R 1/4"	R 1/4" swiveling	208 standard	Blowgun with removable tube	19 958 9671
		6.5 x 10 mm	300 nipple	R 1/4"	208 Star-Tip	Blowgun with removable tube	19 958 9658
		6.5 x 10 mm	320 nipple	320 coupling	208 Star-Tip	Nipple assembled on blowgun	19 958 9760
6.5 x 10 mm		320 nipple	320 coupling	208 standard	Nipple assembled on blowgun	19 958 9761	

OTHER HOSE KITS		Size ID x OD	Connection 1	Connection 2	Description	Part No.
	2 m	5 x 8 mm	R 1/4" swiveling	320 coupling	-	19 958 9895
		8 x 12 mm	R 3/8"	320 coupling	-	19 958 9726
	4 m	5 x 8 mm	303 nipple	303 coupling	-	19 958 9655
		5 x 8 mm	320 nipple	R 1/4" swiveling	-	19 958 9896
		6.5 x 10 mm	303 nipple	303 coupling	-	19 958 9656
		8 x 12 mm	R 3/8"	320 coupling	-	19 958 9727
	6 m	8 x 12 mm	410 nipple	410 coupling	-	19 958 9836
		11 x 16 mm	R 1/2" swiveling	320 coupling	-	19 958 9725
		11 x 16 mm	NPT 1/2" swiveling	320 coupling	-	19 958 9729
	8 m	8 x 12 mm	430 nipple	430 coupling	Swiveling connections	19 958 9821

Thread connections are listed according to ISO Standards (see Page 82 for more information). Check with an authorized CEJN distributor for availability and prices.

