



139R

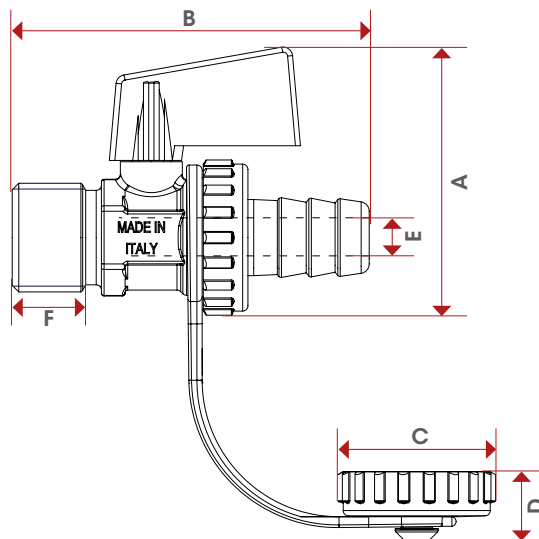

	3/8"	1/2"	3/4"
DN	10	15	20
A	50	50	50
B	62,5	68	68
C	30	30	30
D	13	13	13
E	10	10	10
F	10	13	12
Kg/cm ² bar	10	10	10
LBS - psi	145	145	145

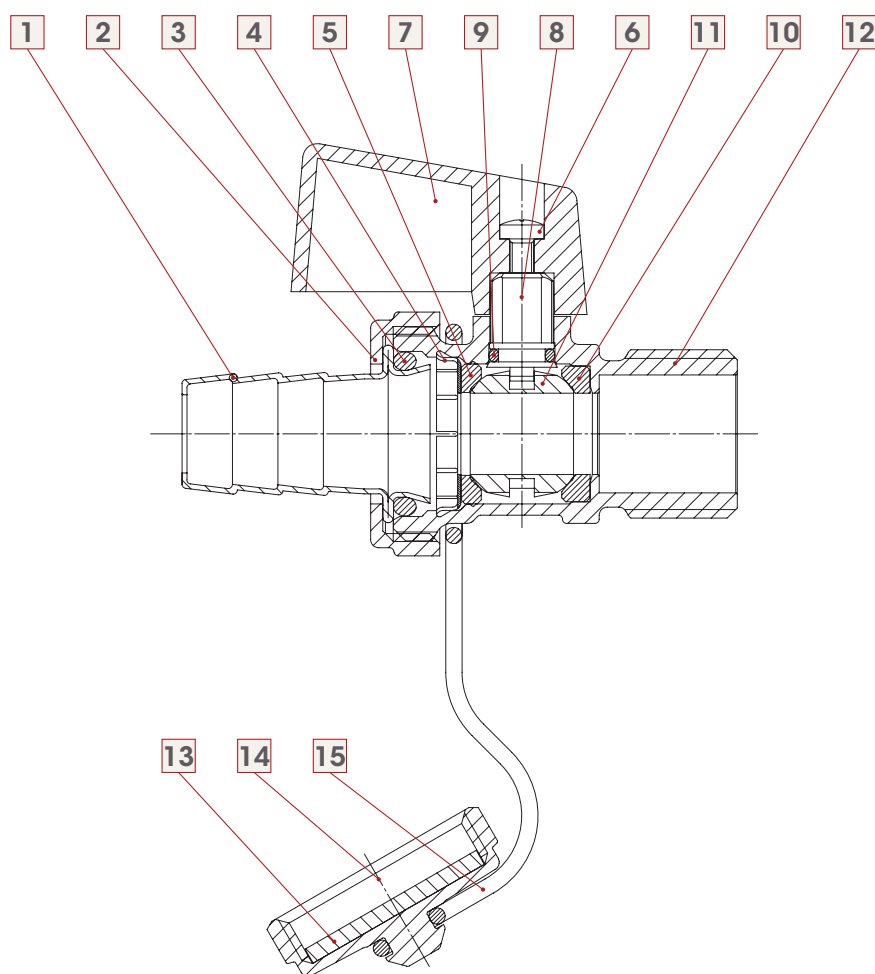

Pos.	DESCRIZIONE / DESCRIPTION	Qt.	MATERIALE / MATERIAL
1	Portagomma / Hose connection	1	Ottone / Brass CW614N
2	Girello / Nut	1	Ottone / Brass CW617N
3	Guarnizione / O-Ring	1	E.P.D.M.
4	Ghiera elastica / Sleeve	1	Acciaio inox / Stainless steel AISI 304
5	Guarnizione di tenuta laterale / Seat	1	E.P.D.M.
6	Vite / Screw	1	Cir UNI947 - 72
7	Leva / Handle	1	Nylon 66
8	Asta di manovra / Stem	1	Ottone / Brass CW614N
9	Guarnizione / O-Ring	1	E.P.D.M.
10	Guarnizione di tenuta laterale / Seat	1	E.P.D.M.
11	Sfera / Ball	1	Ottone cromato / Chrome-plated brass CW614N
12	Corpo / Body	1	Ottone / Brass CW617N
13	Guarnizione / Washer	1	E.P.D.M.
14	Tappo / Cap	1	Ottone / Brass CW617N
15	Laccetto / Strap	1	Elastomero / Elastomer



DECLARATION OF CONFORMITY

(According to EN ISO/IEC 17050-1)

The ITAP S.p.A. manufacturer of valves, fittings, manifolds and accessories for thermo-sanitary plants, with head office in via Ruca 19/21 – 25065 Lumezzane S.S. (BS) Italy.

DECLARES

Under its sole responsibility that the supply bibcocks have been built according to industry standards and conform to their technical specifications, respecting the Company Quality System complies with UNI EN ISO 9001.

Lumezzane 19 November 2013

Industrial Manager.


ITAP S.p.A.
IL CONSIGLIERE DELEGATO
EZIO PATTI