

- > **Port size: 3/8" ... 3/4"**
(ISO G/PTF)
- > **Excelon design allows**
in-line installation
or modular installation
with other Excelon
products
- > **T74B 2/2 valves no**
exhaust
- > **T74T 3/2 valves with**
1/8" tapped exhaust
- > **T74E 3/2 position**
lockout valves help
conform to OSHA
Lockout regulations in
USA market. Exhaust
outlet is not tapped.



Technical features

Medium:

Compressed air only

Maximum operating pressure:

17 bar (250 psi)

Port size:

G3/8, G1/2, G3/4,
3/8 PTF 1/2 PTF , 3/8 PTF

CV factor:

From IN to OUT ports:
3/8": 7,1; 1/2": 8,1; 3/4": 7,7
0,2 from OUT to Exhaust ports on
3/2 valves



Ambient/Media temperature:

-34° ... +65°C (-30° ... +149°F)
Air supply must be dry enough
to avoid ice formation at
temperatures below +2°C (+35°F).

Materials:

Body: Zinc
Elastomers: NBR

Technical data - standard models

Symbol	Port size	Function	Size	Weight (kg)	Model
	G3/8	2/2	—	0,32	T74B-3GA-P1N
	G1/2	2/2	Basic	0,30	T74B-4GA-P1N
	G3/4	2/2	—	0,28	T74B-6GA-P1N
	G3/8	3/2	—	0,32	T74T-3GA-P1N
	G1/2	3/2	Basic	0,30	T74T-4GA-P1N
	G3/4	3/2	—	0,28	T74T-6GA-P1N

Option selector

Function	Substitute
2/2 (Black slide locks in closed position only) No exhaust outlet	B
3/2 (Yellow slide locks in closed position only) Unthreaded exhaust outlet	E
3/2 (Red slide locks in closed position only) Threaded exhaust port	T

T74★-★★A-P1N

Thread form	Substitute
NPT	A
ISO G parallel (standard)	G
Thread size	Substitute
3/8"	3
1/2"	4
3/4"	6

Accessories

Quikclamp®	Quikclamp with wall bracket®	Quikmount pipe adaptor *1)	Porting block with three alternative 1/4" ports	Silencer
				
Page 3	Page 3	Page 3	Page 3	Page 3
4314-51	4314-52	G3/8: 4315-10 G1/2: 4315-11 G3/4: 4315-12 3/8 PTF: 4315-02 1/2 PTF: 4315-03 3/4 PTF: 4315-04	G1/4: 4316-52 1/4 PTF: 4316-50	R1/8: T40B1800 1/8 NPT: MA001A

*1) Please use a Quikmount pipe adaptor if the Quikclamp be mounted at inlet or outlet side.

Pressure switch

Porting block for pressure switch	Pressure switch (0,5 ... 8 bar)	Padlock (brass) with two keys *1)
		
Page 4		
0523110000000000	0881300000000000	0613633000000000


*1) for shut-off valves

Service kits

Service kit
T74E (yellow slide) 4384-710 T74T (red slide) 4384-713
Service kit includes seals and slide.

Drawings

Dimensions in mm
 Projection/First angle

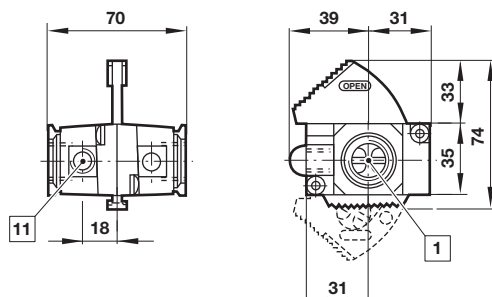


- 1 Main ports 3/8", 1/2" or 3/4" ISO G/PTF
- 11 Exhaust port Rc1/8 or 1/8 PTF


Accessories

Dimensions in mm
 Projection/First angle


Quikclamp®

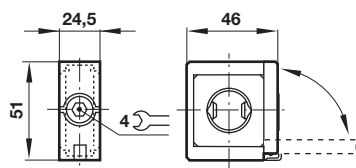


Quikclamp® with wall bracket

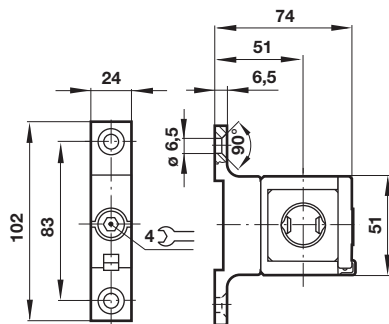

Porting block




Pipe adapter



1 Main ports 3/8", 1/2" or 3/4"
 ISO G/PTF


10 Ports 1/4" ISO G/PTF plugged

Wall mounting bracket

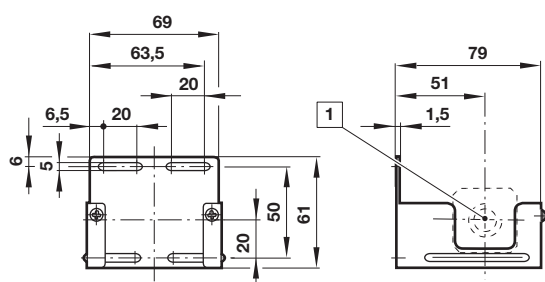

1 Main ports


Porting block for pressure switch

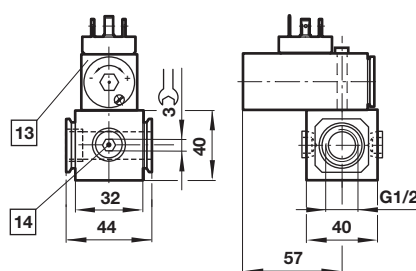

13 Pressure switch is not in scope of delivery

14 Alternative G1/4 ports plugged

Silencer



Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under

»Technical features/data«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult IMI Precision Engineering, Norgren Inc. Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.